


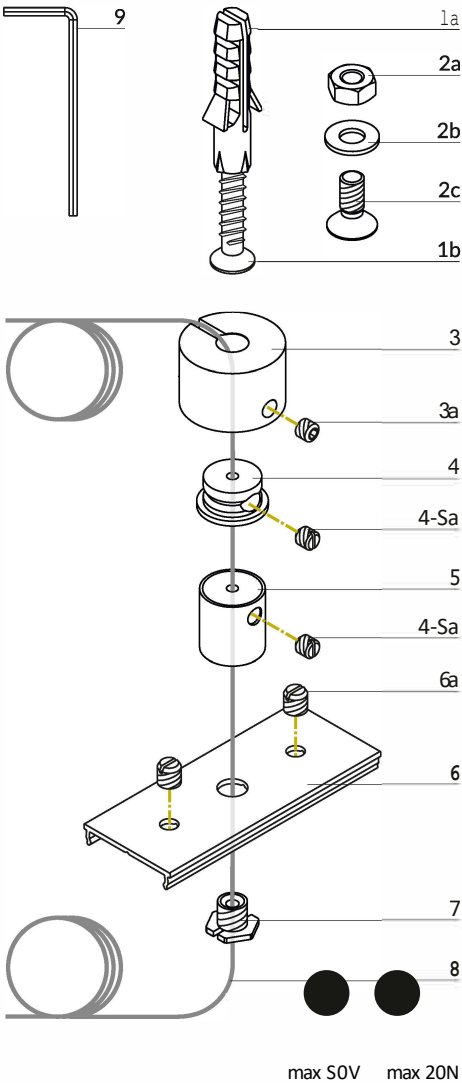


Set contains:		pcs.
1a	dowel pin Fi8x40	2
1b	screw 4x40	2
2a	nut M4	2
2b	round washer M4x0,8	2
2c	machine screw M4x10	2
3	body Fi18x12	2
3a	grub screw M4x4 Allen	2
4	mandrel Fi12x6	2
4-Sa	plastic grub screw M4x4	4
5	body Fi10x12	2
6	FIX16 base	2
6a	grub screw M4x5	4
7	nipple with flange M5x4,5	2
8	teflon sheath wire 1x0,50 2500 mm	2
9	Allen key	1

Fitting profiles

Profile:	Mounting method: A
SMART10	
BEGTON12	A
UNI12	A
SMART16	A
LINEA20	A / B / C (FIX16)
WIDE24	A
QUARTER10	A
ARC12	A
MIKRO-LINE12	A
VARIO30-01	A / B / C (VARIO30-10)
VARIO30-02	A / B / C (VARIO30-10)
VARIO30-03	A / B / C (VARIO30-10)
VARIO30-08	A / B / C (VARIO30-09)

- A - Directly to the profile
- B - Using 6 - FIX16 base
- C - Use the cover along the entire length of the profile (type of cover)

Electrical connection layout

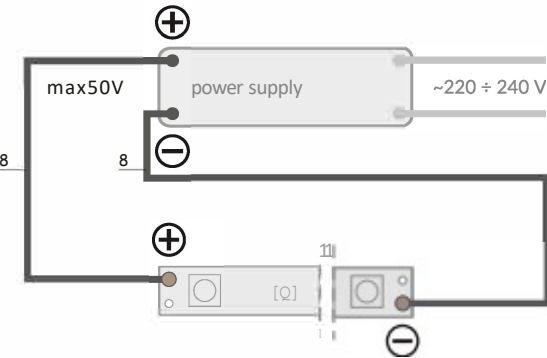

Mounting must be performed by an appropriately qualified person



Mounting




drill




screwdriver

Installation on the example of LINEA20 LED profile, with optional use of the power supply case (VARIO30-08 and VARIO30-09)
All the steps shown below should be repeated for the second conduit

I PROFILES PREPARING

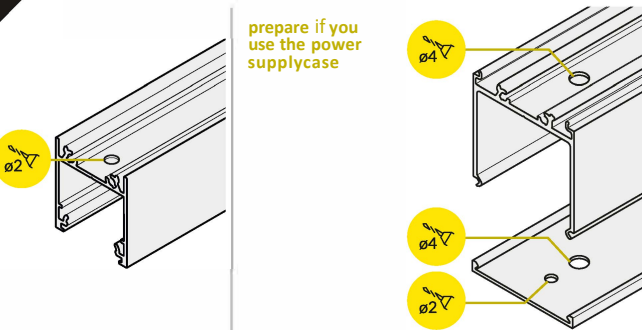


II MOUNTING TO THE PROFILE

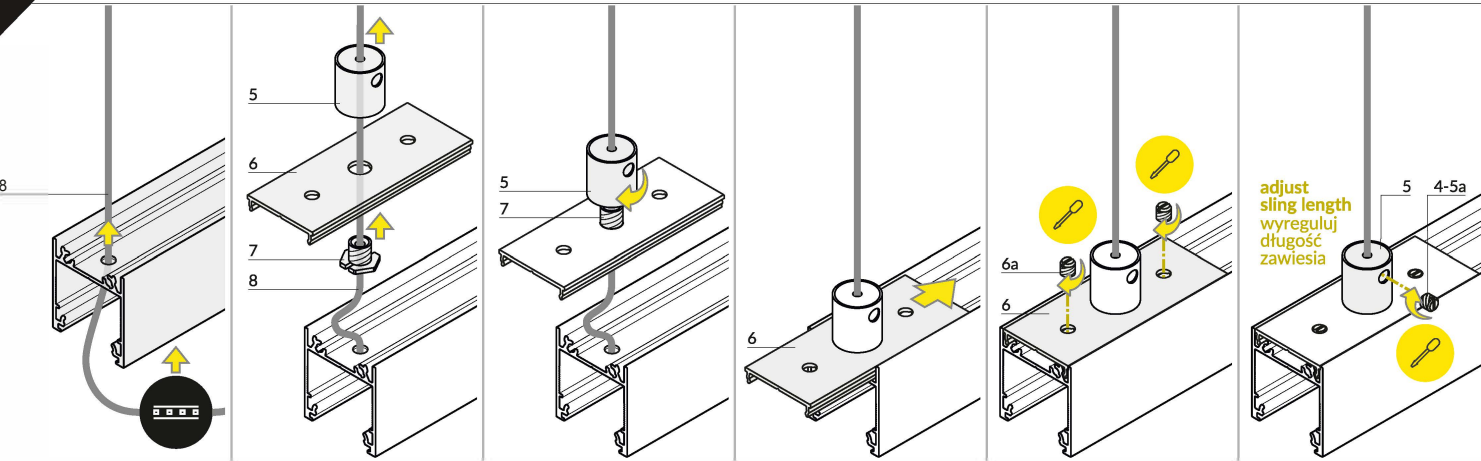

III MOUNTING TO THE CEILING

Direct

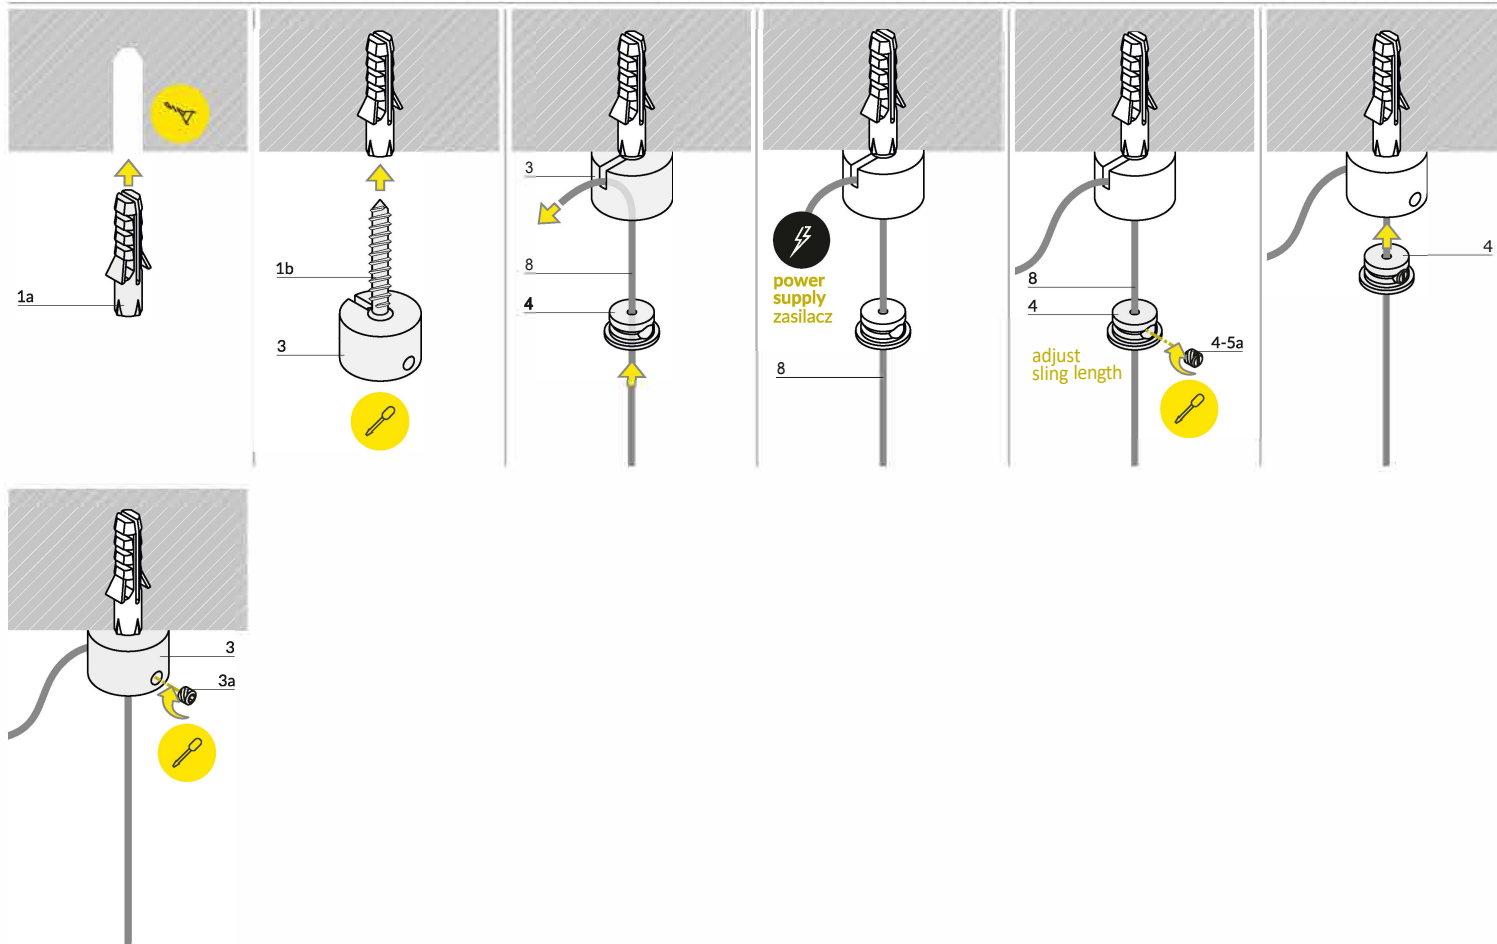

With optional power supply cover

