


RF 4 Channel Constant Voltage LED Driver


Model No.: PB-75-12-4, PB-75-24-4

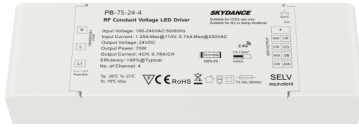

Features

- Dimmable LED driver with RF control, apply to single color, dual color or RGB/RGBW LED constant voltage strips
- Match with Skydance's 2.4G single color, dual color and RGB/RGBW remote.
One RF LED driver accepts up to 10 remote controls
- Universal AC input / Full range
- 4 channel constant voltage output, Max. total output power 75W
- When using with RGB/RGBW light, built in 10 dynamic mode, include jump or gradual change style
- Auto-transmitting function: LED driver automatically transmit signal to another LED driver with 30m control distance
- Synchronize on multiple number of LED drivers
- Connect with external push switch to achieve on/off and 0-100% dimming function
- Over-heat / Over-load / Short circuit protection, recover automatically
- Full protective plastic case
- Suitable for indoor LED lighting application
- 5 Year, 50,000hr warranty

Mechanical Structures and Installations




Technical Parameters

Model	PB-75-12-4	PB-75-24-4	
Output	Output Voltage	12VDC	24VDC
	Output Current	4CH x 1.56A	4CH x 0.78A
	Output Power	Max. 75W	
	Dimming Range	0~100%	
	Ripple & Noise	<=200mV/230VAC	
	PWM Frequency	500Hz	
	Rise Time	500ms/115VAC, 424ms/230VAC	
Input	Hold Time	3.6ms/115VAC, 4.5ms/230VAC	
	Input Voltage Range	100VAC~240VAC	
	Frequency Range	50/60Hz	
	Efficiency	90%/230VAC	
	Alternating Current	1.29A/115VAC, 0.74A/230VAC	
	Inrush Current	Cold start 27.5A at 230VAC	
	Leakage Current	<5mA	
Protection	No Load Power	1W/115VAC, 1.5W/230VAC	
	Over Load Power	Shut down the output when current load >= 120%~150%, auto recovers.	
	Short Circuit	Shut down automatically if short circuit occurs, auto recovers.	
Environment	Over Temperature	Intelligently adjust or turn off the output current if the PCB temp > 100°C, auto recovers.	
	Working Temperature	-30°C~50°C	
	Tease Max	70°C	
	Working Humidity	20%~90%RH, non-condensing	
	Storage Temperature/Humidity	-40°C~80°C, 10%~95%RH	
	Temperature Coefficient	±0.03%/°C (0-50%)	
	Vibration Resistance	10-500Hz, 2G, 6min/cycle, X,Y,Z axes/2min	
Safety&EMC	IP Rating	IP20	
	Security Specifications	IEC/EN61347-1, IEC/EN61347-2-13	
	Withstand Voltage	I/P/O/P: 3750VAC	
	Insulation Resistance	I/P/O/P: 100MΩ/500VDC/25°C/70%RH	
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3	
EMC Immunity	EN61000-4-2 3.4 5.6 8.11, EN61547		
Certifications	CE, EMC		

Applications

- Suitable for LED related fixture or appliance which use LED light bar and LED tape (like LED Decoration or Advertisement devices).
- Office / Commercial / Domestic Lighting, Hotels, Retail and Display.
- Use for retrofit upgrades & new luminaire designs.

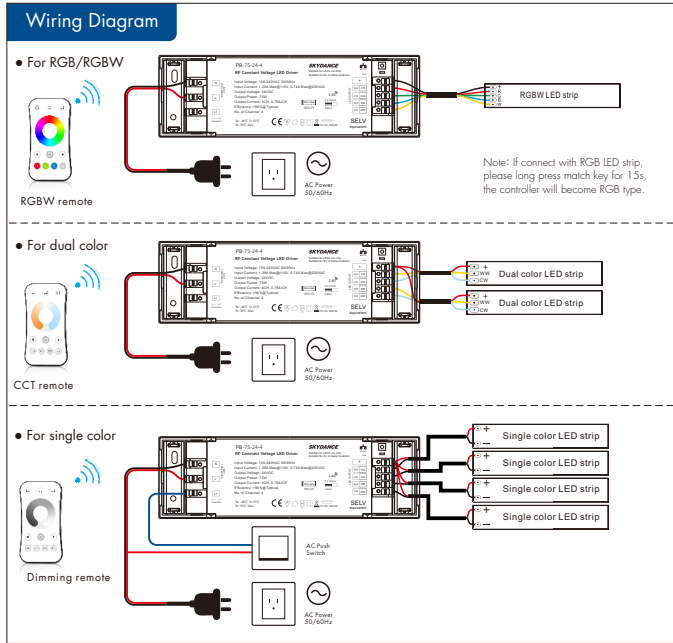

AC Push Dim Function

Short press: Turn on or off light.
 Long press (1-6s): Press and hold to continuous 256 levels dimming.

Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use Match key

Match:
 Short press match key, immediately press on/off key [single zone remote] or zone key [multiple zone remote] of the remote.

Delete:
 Press and hold match key for 5s to delete all match. The light blinks 5 times means all matched remotes were deleted.

Use Power Restart

Match:
 Switch off the power, then switch on power again, immediately short press on/off key [single zone remote] or zone key [multiple zone remote] 3 times on the remote. The light blinks 3 times means match is successful.

Delete:
 Switch off the power, then switch on power again, immediately short press on/off key [single zone remote] or zone key [multiple zone remote] 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

RGB/RGBW Dynamic mode list

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Yellow cyan purple smooth	10	White fade in and out

Application notes

1. All the receivers in the same zone.



RF remote

Auto-transmitting: One receiver can transmit the signals from the remote to another receiver within 30m, as long as there is a receiver within 30m, the remote control distance can be limitless.

Auto-synchronization: Multiple receivers within 30m distance can work synchronously when they are controlled by the same remote, under same dynamic mode and with same speed.

Receiver placement may offer up to 30m communication distance. Metals and other metal materials will reduce the range. Strong signal sources such as WiFi routers and microwave ovens will affect the range.

We recommend for indoor applications that receiver placements should be no further apart than 1.5m.

2. Each receiver(one or more) in a different zone, like zone 1, 2, 3 or 4.



Dual color control

CH1=Warm white LED

CH2=Cool white LED


Each channel can supply up to 75W and white balance can be controlled as such:

Color temperature	Cool white	Neutral white	Warm white
Power distribution	CH1=0W,CH2=75W	CH1=36W,CH2=36W	CH1=75W,CH2=0W

Linear dual color tuning



Dimming curve for CCT



Dimming curve for RGB/DIM

