


1 Channel Constant Voltage DALI LED Dimmer

Model No.: DA1

1 Channel/Constant voltage/1.5A output/PWM dimming/Push Dim/Multiple protection

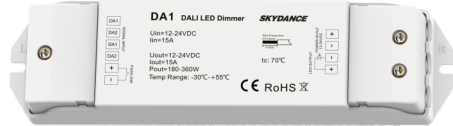

CE RoHS

Features

- Constant voltage DALI LED Dimmer with 1 channel, 1.5A output.
- In accordance with DALI standard protocol IEC 62386-102, IEC 62386-207 and in compliance with DALI products from other international incorporation.
- DALI address will be automatically assigned by DALI master, 1 DALI address.
- PWM digital dimming, standard DALI logarithmic dimming curve.
- Connect with external push switch to achieve on/off and dimming function.
- Over-heat / Over-load / Short circuit protection, recover automatically.

Technical Parameters

Input and Output

Input voltage	12-24VDC
Input current	1.5A
Output voltage	12-24VDC
Output current	1CH, 1.5A
Output power	180W/360W (12V/24V)
Output type	Constant voltage

Environment

Operation temperature	T _a : -30°C ~ +55°C
Case temperature (Max.)	T _c : +85°C
IP rating	IP20


Dimming data

Input signal	DALI + Push Dim
Dimming range	0 - 100%
Dimming curve	Logarithmic
PWM Frequency	500Hz

Warranty and Protection


Warranty	5 years
Protection	Reverse polarity Over-heat Over-load Short circuit

Mechanical Structures and Installations

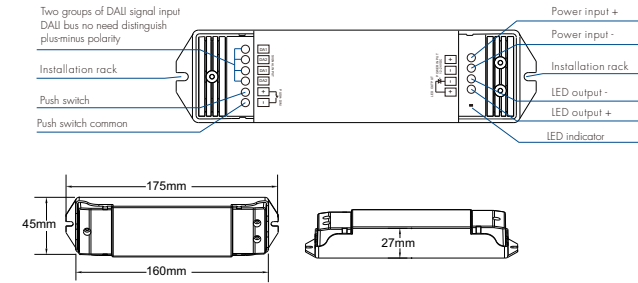


Wiring Diagram

- DA1 connect with DALI master

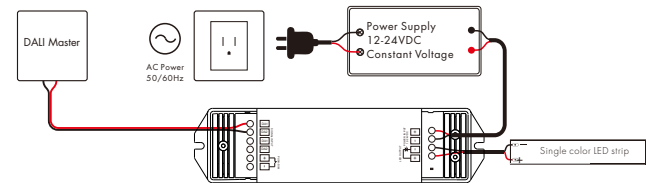

- DA1 connect with push switch

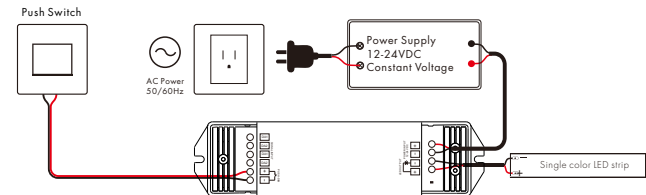

DALI control

- **DALI Address Assigned by DALI Master**

This product is designed with 1 DALI address input and 1 channel output, DALI address is assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

- **DALI priority**

The DALI master or Push switch can be connected at the same time, which makes the product more user-friendly and more options to fit for some extra-ordinary demands.

If the controller be used with the PushDim interface prior to using the DALI interface, the DALI command will make it return DALI control automatically.

Push Dim Function

The provided PushDim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches.

- **Short press:**

Turn on or off light.

- **Long press (1-6s):**

Press and hold to stepless dimming,

With every other long press, the light level goes to the opposite direction.

- **Dimming memory:**

Light returns to the previous dimming level when switched off and on again, even at power failure.

- **Synchronization:**

If more than one controller are connected to the same push switch, do a long press for more than 10s, then the system is synchronized and all lights in the group dim up to 100%.

This means there is no need for any additional synchrony wire in larger installations.

We recommend the number of controllers connected to a push switch does not exceed 25 pieces,

The maximum length of the wires from push to controller should be no more than 20 meters.

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.